


ComAnt[®] Communications Antennas



FREQUENCY INDEPENDENT DATA


Description: LTE yagi
 Frequency: 791-960MHz
 Impedance: 50 ohm
 Gain: 6 dBi
 Polarization: vertical/horizontal
 Connector: N-female
 VSWR: < 1.3
 Radome: UV resistant ABS, RAL 7012, PU foam filling
 Radiator: copper
 Passive elements: coated aluminium
 Attachment: Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self locking nuts
 Lightning protection: DC-short circuited
 Temperature: -40° - +80° C
 IP: 67

RADIATION PATTERN 826.5 MHz




— E dB — H dB

RADIATION PATTERN 920 MHz



— E dB — H dB

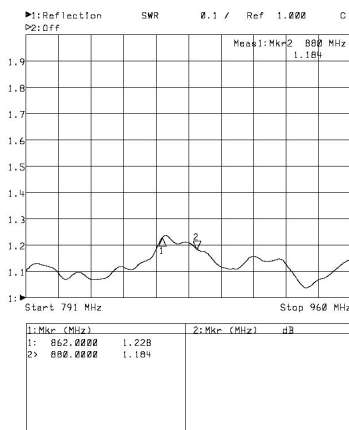

CALTEY+ LTE YAGI