



ComAnt[®] Communications Antennas



FREQUENCY INDEPENDENT DATA

Description: quarter wave whip, sleeve feed for proper matching with small sized radios
 Frequency: 221-239 MHz, 336-364 MHz, 370-390 MHz, 405-440 MHz, 440-475 MHz, 830-890 MHz, 890-960 MHz
 Impedance: 50 ohm
 Gain: 2 dBi
 Polarization: vertical
 Connector: BNC-male/N-male/SMA-male/TNC-male
 VSWR: < 1.5
 Radome: PE, heat shrink adhesive tubing
 Radiator: copper
 Attachment: directly to terminal
 Temperature: -40° - +80°C
 IP: 62

RADIATION PATTERN

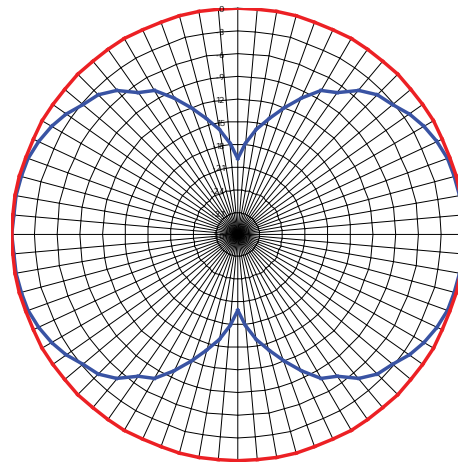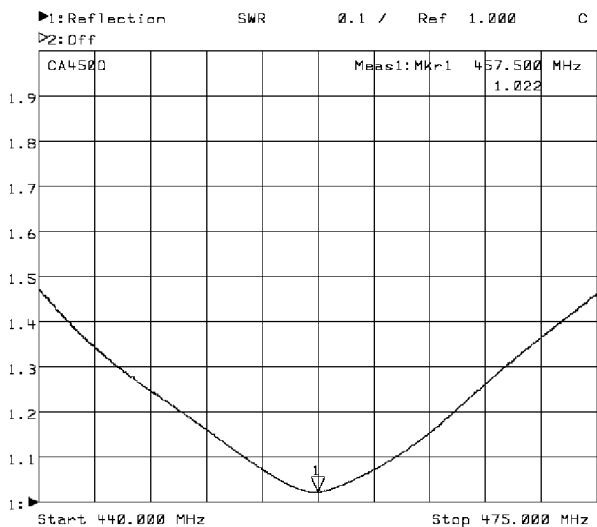

— E dB — H dB

CompleTech
ComAnt[®]-antennas by CompleTech, Finland

CAQ QUARTER WAVE WHIP