

## DS-6700HUHI SERIES TURBO HD ENCODER



### Features and Functions

#### Video Input and Transmission

- Self-adaptive HDTV/HD/SD/AV/NTSC/PAL signal input
- Up to 5 MP HDTV video input and live view
- Long distance transmission over UTP and coaxial cable

#### Compression and Recording

- H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264/MJPEG for the sub-stream of analog cameras
- Full channel recording at up to 5 MP resolution

#### Storage and Playback

- 1 Micro SD card slot (8G up to 128 GB capacity)
- Searching and playing back record files by camera number, recording type, start time, end time, etc.

#### Smart Function

- Supports line crossing detection, intrusion detection, sudden scene change detection, and audio exception detection

#### Network & Ethernet Access


- DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M self-adaptive Ethernet interface



## Specifications

Model		DS-6701HUHI	DS-6704HUHI
Video/Audio input/output	Video input	1-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	4-ch
	HDTVI input	5MP, 4MP, 3MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25	5MP, 4MP, 3MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25
	AHD input	1080p25, 1080p30, 720p25, 720p30	
	HDCVI input	1080p25, 1080p30, 720p25, 720p30	
	CVBS input	PAL/NTSC	
	Audio input	1-ch, 3.5mm interface (2.0 Vp-p, 1 kΩ) (LINE IN)	4-ch, RCA (2.0 Vp-p, 1 KΩ)
	Audio output	1-ch, RCA (Linear, 1 KΩ)	1-ch, RCA (Linear, 1 KΩ)
	Synchronous playback	1-ch	4-ch
Video/Audio encoding	Video compression	MJPEG (sub-stream)/H.265+/H.265/H.264+/H.264	
	Audio compression	G.711u	
	Main stream	5 MP/4 MP/ 3 MP/1080p/720p/WD1/4CIF/VGA/CIF	5 MP/4 MP/ 3 MP/1080p/720p/WD1/4CIF/VGA/CIF
	Frame rate	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)
	Video bit rate	32 Kbps to 10 Mbps	
	Audio bit rate	64 Kbps	
	Dual stream	Support	
	Network management	Network protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS, ONVIF profile S
Storage	SD Card	1 Micro SD card slot, support Micro SD card	
	Capacity	8G Up to 128 GB	
External interface	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1 <sup>st</sup> audio input)	
	Network interface	1, RJ45 10M/100Mself-adaptive Ethernet interface	
	Serial interface	RS-485 (half-duplex); RS-232	
	Alarm in/out	1/1	4/2
General	Power supply	12 VDC	
	Consumption	≤ 15W	
	Working temperature	-10 °C to +55 °C (+144 °F to +131 °F)	
	Working humidity	10% to 90%	
	Dimensions (W × D × H)	162.5 × 114 × 47.5 mm(6.4 × 4.5 × 1.9 inch)	
	Weight	≤ 1.5 kg (3.3 lb)	

## Physical Interfaces

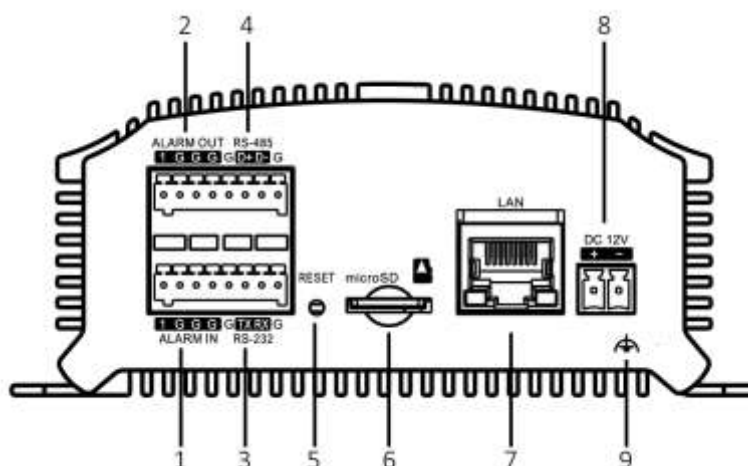

The rear panel of DS-6704HUHI provides 4 alarm in and 2 alarm out interfaces.

Index	Description	Index	Description
1	Alarm In	6	Micro SD Card Slot
2	Alarm Out AUDIO IN, RCA Connector	7	LAN Network Interface
3	RS-232 Serial Interface	8	12 VDC Power Input
4	RS-485 Serial Interface	9	GND
5	RESET		

## Available Models

DS-6701HUHI, DS-6704HUHI

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28468900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01629-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33011-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4632090  
salesmea@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-869-67-99  
salaru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com